



# ECO STATIC AERATOR

The ECO STATIC aerator operates hydraulically. It adds the desired amount of air needed for


**DEGASSING      AERATION      OXYGENATING**




**KILLING BACTERIA, REMOVING IRON, SULPHUR  
SMELLS, ALGAE**

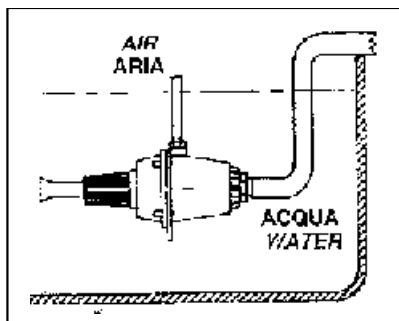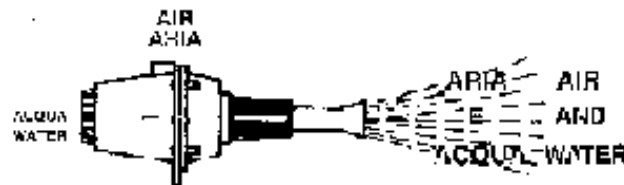

It can be fitted to its own external pump, alone and add multiple ECO units as needed.

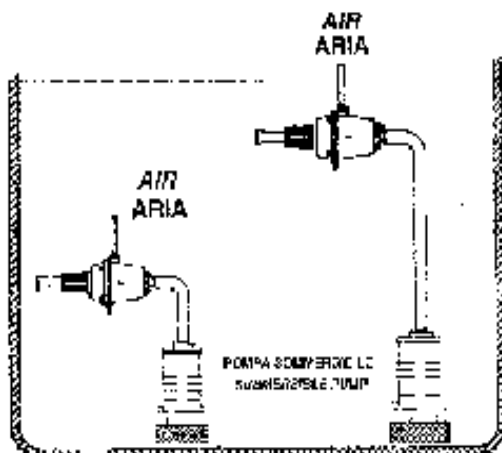


It can be fitted with a submersible pump, and again more than one unit.




# Eco Static Aerator

Uses  
Storage Water Tanks  
Dams, Aquaculture,  
Circulation of water  
De-stratification

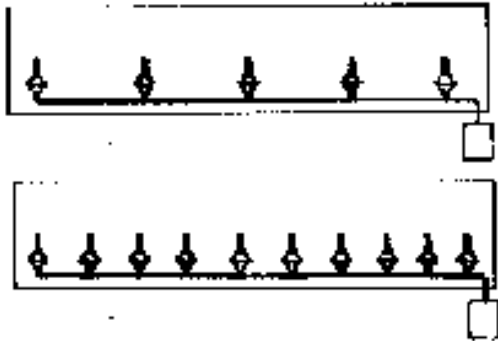


Multiple units off one pump


It can be set up on a bracket in any manner necessary.

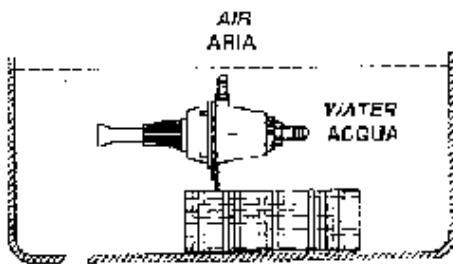

It can be weighted down.

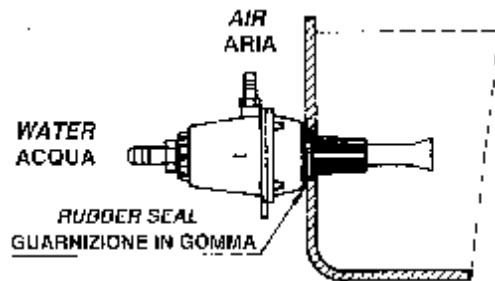

## CHOOSING THE TYPE OF NOZZLE

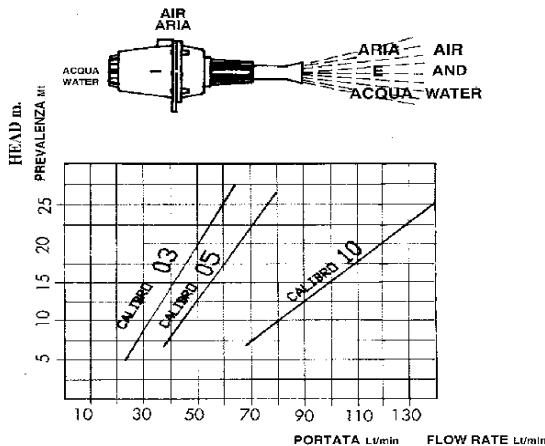

It can be fitted to your existing pump system with the appropriate choice from three venturi nozzles supplied.

From the small 03 Nozzle up to the 10 to the performance of your pump

**Another Quality Product from the Water Treatment and Management professionals**

**Aquarius Drilling and Water Treatment**